(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 15 September 2005 (15.09.2005)

PCT

(10) International Publication Number WO 2005/085824 A1

(51) International Patent Classification⁷: 27/403, 27/49

G01N 27/28,

(21) International Application Number:

PCT/GB2005/000765

(22) International Filing Date: 1 March 2005 (01.03.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 04251228.5

3 March 2004 (03.03.2004) EP


- (71) Applicant (for all designated States except US): ZELL-WEGER ANALYTICS AG [CH/CH]; Willstrasse 11, CH-8610 Uster (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): WILLIAMSON, Martin [GB/GB]; Zellweger Analytics Ltd., Hatch Pond House, 4 Stinsford Road, Nuffield Estate, Poole, Dorset BH17 ORZ (GB). O'GRADY, David [GB/GB]; Zellweger


Analytics Ltd., Hatch Pond House, 4 Stinsford Road, Nuffield Estate, Poole, Dorset BH17 0RZ (GB).

- (74) Agents: HEDLEY, Nicholas, James, Matthew et al.; Kilburn & Strode, 20 Red Lion Street, London WC1R 4PJ (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LIQUID ELECTROLYTE GAS SENSOR COMPRISING RIGID POROUS ELECTRODE SUPPORT

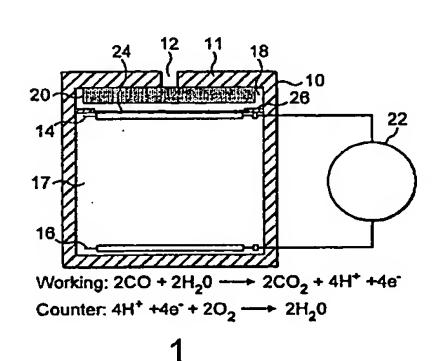

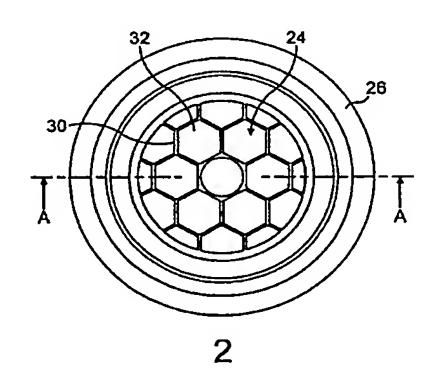

WO 2005/085824 A1

(57) Abstract: An electrochemical gas sensor is disclosed comprising: a working electrode (14) comprising a gas porous membrane and a catalyst layer formed on one side of the membrane; a counter electrode (16) comprising a catalyst; electrolyte (17) in contact with the catalyst both of the working electrode and of the counter electrode; and a support (24) that is in contact with, and presses down on, the side of the working electrode remote from the electrolyte and that compresses the electrodes and the electrolyte together. The support has a thickness of not greater than 0.5mm and includes open areas allowing gas to contact the membrane. The bars (30) between the open areas (32) of the support constitute less than 40%, of the support, including the open areas. The support allows for a greater response speed and provides greater efficiency of catalyst usage. By making the support bars thin, the amount of electrode catalyst occluded by the support is reduced.

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.